



Product type:

Combination Box

K100

Dimention:

209 x 278 x 126 mm

8.2 x 10.9 x 5 inch

CODE: 452.0008.0000.000

TECHNICAL DETAILS



Materials:

Plastic Opaque Cover: ABS RAL 7035 -Light Grey

Plastic Transparent Cover: Polycarbonate -Grey Transparent

Plastic Case Body: ABS RAL 7035 -Light Grey

Gasket: Polyurethane

Rating:

Standard: EN 60670-1

Ingress Protection (EN 60529): IP67


Impact Resistance (EN 60068-2-75): IK10

Electrical insulation: Totally insulated

Halogen Free

Temperatures:

Continuous °C : -25 ... +60 °C

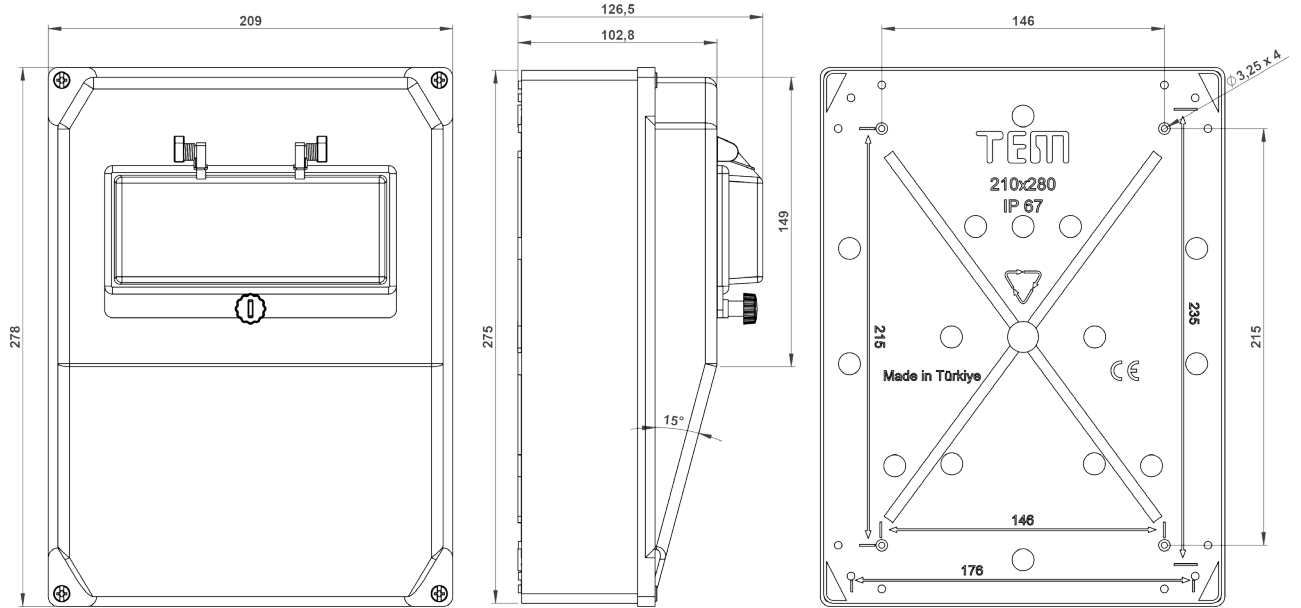


		Inner Quantity	Dimensions	Gross Weight	CBM
Packing Details:	Box	1pcs	29x16x24cm	1.711kg	3.51
	Cardboard	12pcs	74x52x59cm	21.80kg	75.68



452.0000.3160.022
2(3x16A) CEE IP44
2(1x16A) Schuko IP54



452.0000.4160.022
2(4x16A) CEE IP44
2(1x16A) Schuko IP54




452.0000.5160.022
2(5x16A) CEE IP44
2(1x16A) Schuko IP54



452.0000.3320.022
2(3x32A) CEE IP44
2(1x16A) Schuko IP54



452.0000.4320.022
2(4x32A) CEE IP44
2(1x16A) Schuko IP54



452.0000.5320.022
2(5x32A) CEE IP44
2(1x16A) Schuko IP54



452.0000.5321.020
2(5x32A) CEE IP67



452.3321.4321.110
1(3x32A) CEE IP67
1(4x32A) CEE IP67




452.0000.4321.020
2(4x32A) CEE IP67




452.0000.4160.011
1(4x16A) CEE IP44
1(1x16A) Schuko IP54



452.0000.4160.012
1(4x16A) CEE IP44
2(1x16A) Schuko IP54



452.0000.4250.021
2(4x25A) IP44
1(1x16A) Schuko IP54



452.0000.4250.022
2(4x25A) IP44
2(1x16A) Schuko IP54



452.0000.4320.024
2(4x32A) CEE IP44
4(1x16A) Schuko IP54



452.0000.5320.012
1(5x32A) CEE IP44
2(1x16A) Schuko IP54



452.0000.5321.014
1(5x32A) CEE IP67
4(1x16A) Schuko IP54



452.0000.3163.022
2(3x16A) IP44
2(1x16A) Schuko IP54



452.3323.3163.112
1(3x32A) IP44 / 1(3x16A) IP44
2(1x16A) Schuko IP54



452.0000.3323.022
2(3x32A) IP44
2(1x16A) Schuko IP54



Product type:

Combination Box

K100

Dimention:

209 x 278 x 126 mm

8.2 x 10.9 x 5 inch

CODE: 352.0008.0000.000

TECHNICAL DETAILS



Materials:

Plastic Opaque Cover: ABS RAL 7035 -Light Grey

Plastic Transparent Cover: Polycarbonate -Grey Transparent

Plastic Case Body: ABS RAL 7035 -Light Grey

Gasket: Polyurethane

Rating:

Standard: EN 60670-1

Ingress Protection (EN 60529): IP44


Impact Resistance (EN 60068-2-75): IK10

Electrical insulation: Totally insulated

Halogen Free

Temperatures:

Continuous °C : -25 ... +60 °C

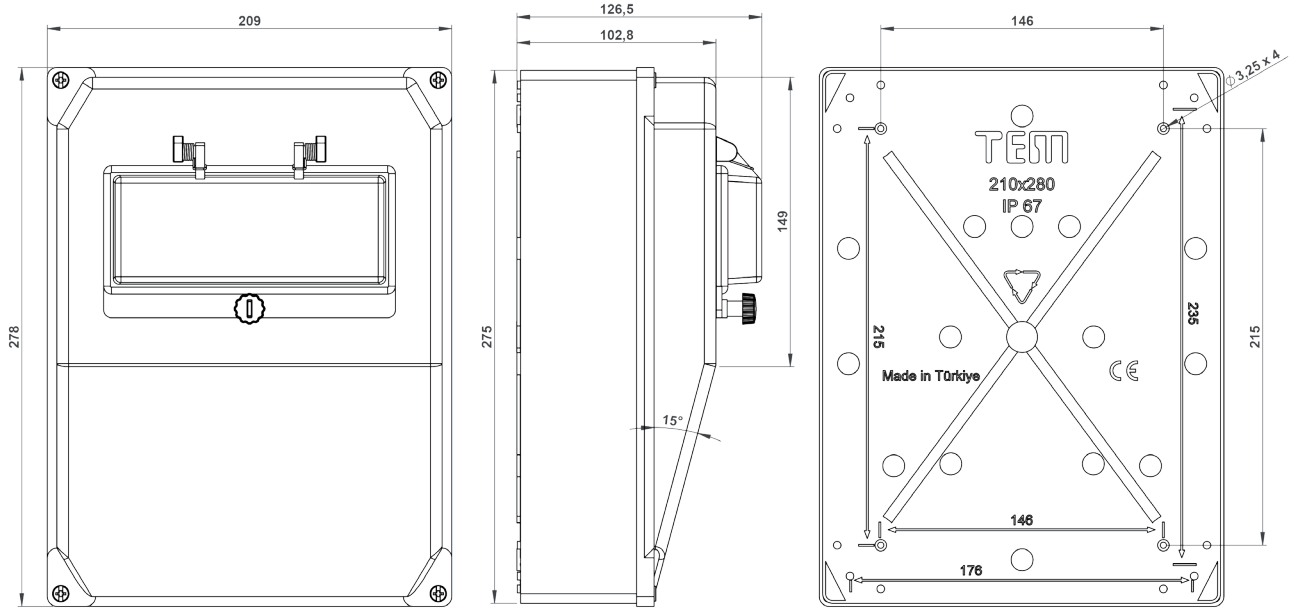


		Inner Quantity	Dimensions	Gross Weight	CBM
Packing Details:	Box	1pcs	29x16x24cm	1.711kg	3.51
	Cardboard	12pcs	74x52x59cm	21.80kg	75.68



352.0000.3160.022
2(3x16A) CEE IP44
2(1x16A) Schuko IP54



352.0000.4160.022
2(4x16A) CEE IP44
2(1x16A) Schuko IP54



352.0000.5160.022
2(5x16A) CEE IP44
2(1x16A) Schuko IP54



352.0000.3320.022
2(3x32A) CEE IP44
2(1x16A) Schuko IP54



352.0000.4320.022
2(4x32A) CEE IP44
2(1x16A) Schuko IP54



352.0000.5320.022
2(5x32A) CEE IP44
2(1x16A) Schuko IP54



352.0000.5321.020
2(5x32A) CEE IP67



352.3321.4321.110
1(3x32A) CEE IP67
1(4x32A) CEE IP67




352.0000.4321.020
2(4x32A) CEE IP67




352.0000.4160.011
1(4x16A) CEE IP44
1(1x16A) Schuko IP54



352.0000.4160.012
1(4x16A) CEE IP44
2(1x16A) Schuko IP54



352.0000.4250.021
2(4x25A) IP44
1(1x16A) Schuko IP54



352.0000.4250.022
2(4x25A) IP44
2(1x16A) Schuko IP54



352.0000.4320.024
2(4x32A) CEE IP44
4(1x16A) Schuko IP54



352.0000.5320.012
1(5x32A) CEE IP44
2(1x16A) Schuko IP54



352.0000.5321.014
1(5x32A) CEE IP67
4(1x16A) Schuko IP54



332.0000.3163.022
2(3x16A) IP44
2(1x16A) Schuko IP54



352.3323.3163.112
1(3x32A) IP44 /1(3x16A) IP44
2(1x16A) Schuko IP54



352.0000.3323.022
2(3x32A) IP44
2(1x16A) Schuko IP54