



Three way three phase rubber socket

380 - 415 V ~

25A


3P + $\perp$

CODE: 540.425.130

TECHNICAL DETAILS



Designation:	Three way three phase rubber socket 3P+E
Connection Method:	3-Pole Screw Terminal 25A Max (2,5mm ²) with strain relief angel
Standard:	DIN 49440-1:2006-01
Net Weight:	442 gr
Casy-Cover Plastic Material:	Thermoplastic Elastomer
Contact-Contacting Plastic Material:	Copolymer
Cable Holder Plastic Material:	PA6
Screw:	Cq - 22
Busbar:	MS 58 Brass

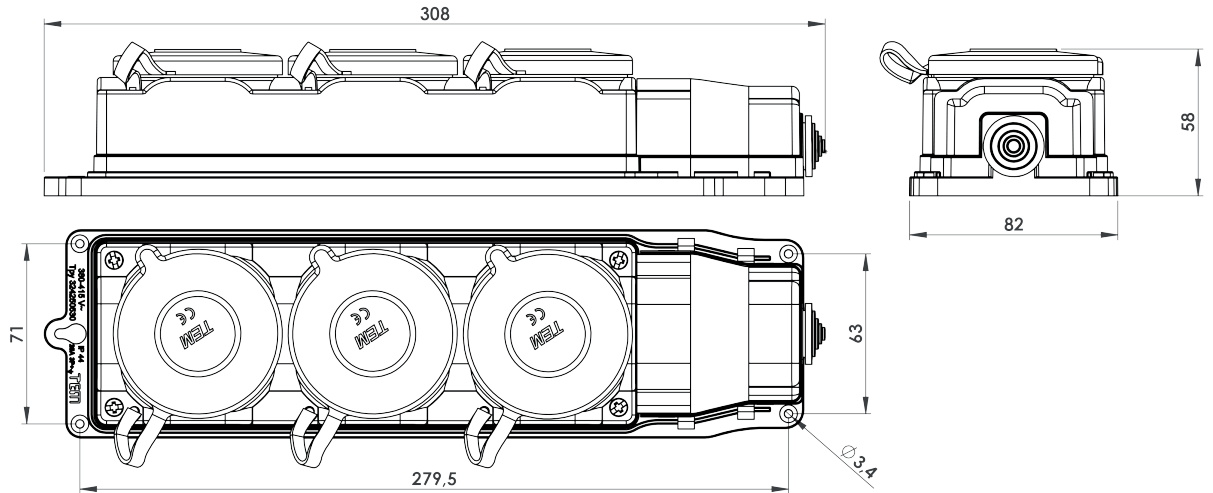

		Inner Quantity	Dimensions	Gross Weight	CBM
Packing Details:	Box	8pcs	24x36x17cm	3802kg	4.90
	Cardboard	48pcs	50x58x38cm	24.075kg	36.73
	Pallet	-pcs	-cm	-kg	-kg

Selimpaşa Ortaköy Sanayi Bölgesi, İlter Bulvarı, Mor Menekşe Sok. No:5 Silivri / İSTANBUL

•Tel: +90 (212) 485 19 00 Pbx •www.temteknik.com •info@temteknik.com