

Modular Unischuko Sockets with Cable

Double Socket for Cable Trunking

200 - 250 V ~

16 A


2P + 

CODE: 320.002.002

TECHNICAL DETAILS



Designation:	2 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	68 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

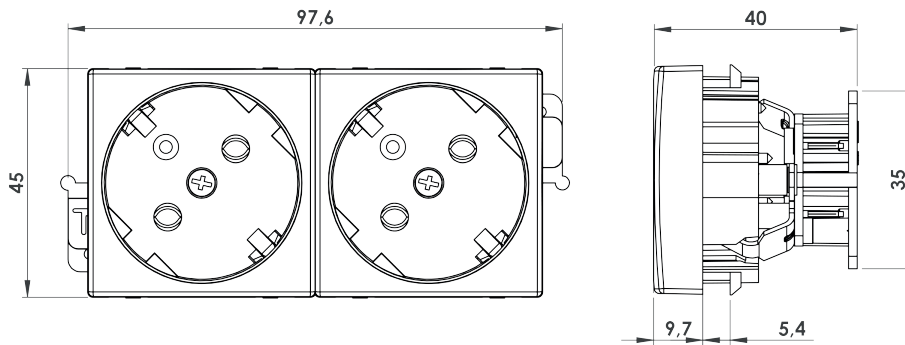

Packing Details:

	Inner Quantity	Dimensions	Gross Weight	CBM
Box	50pcs	24x36x17cm	3.970kg	4.90
Cardboard	600pcs	60x75x52cm	47.640kg	78



Modular Unischuko Sockets with Cable

Triple Socket for Cable Trunking

200 - 250 V ~

16 A


2P + ⏏

CODE: 320.003.002


TECHNICAL DETAILS



Designation:	3 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	101 gr
Casy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

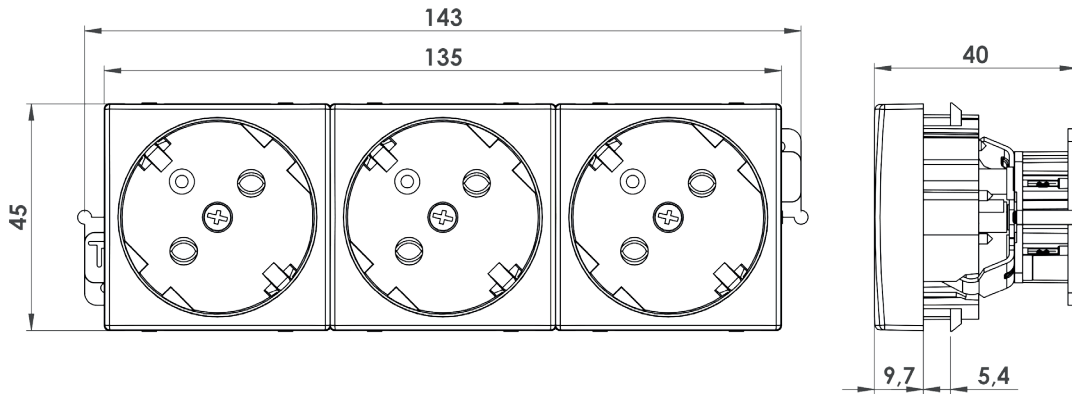

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	40pcs	24x29x16cm	4.310kg	4.90
	Cardboard	480pcs	58x50x49cm	51.720kg	78

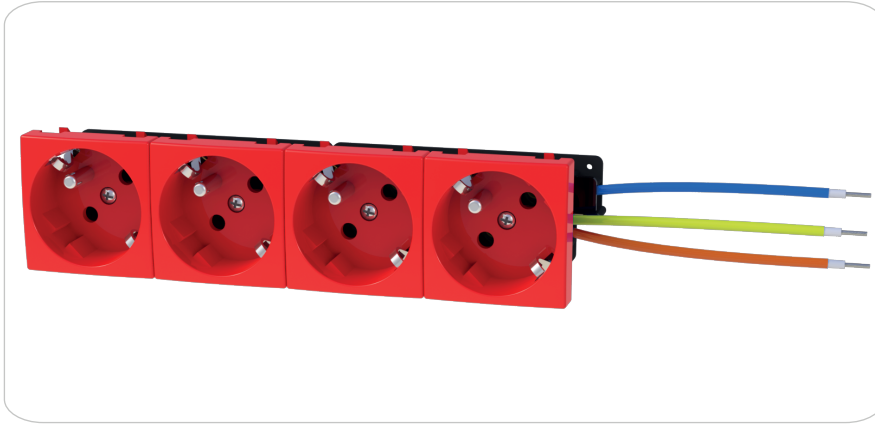

Modular Unischuko Sockets with Cable

Quadruple Socket for Cable Trunking

200 - 250 V ~

16 A


2P + 

CODE: 320.004.002


TECHNICAL DETAILS



Designation:	4 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	134 gr
Casy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

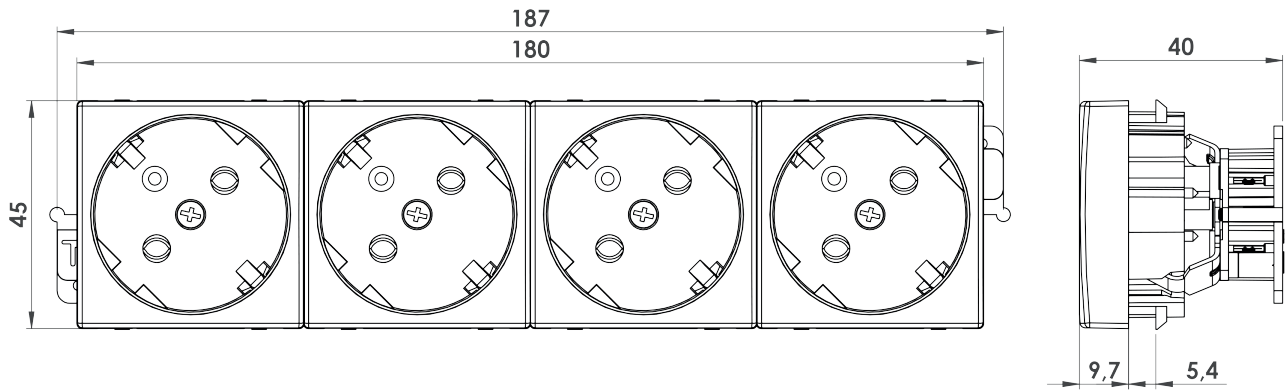

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	30pcs	24x29x16cm	4.290kg	4.90
	Cardboard	360pcs	58x50x49cm	51.480kg	78

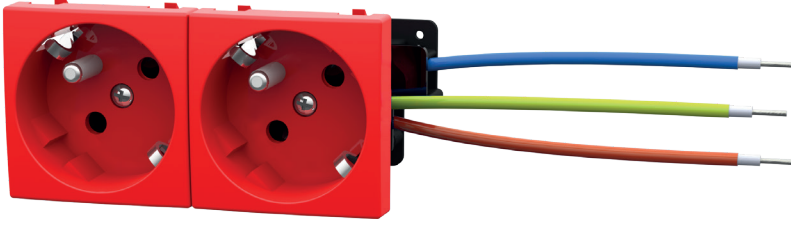

Modular Unischuko Sockets with Cable

Double Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P + 

CODE: 320.002.102

TECHNICAL DETAILS



Designation:	2 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	71 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

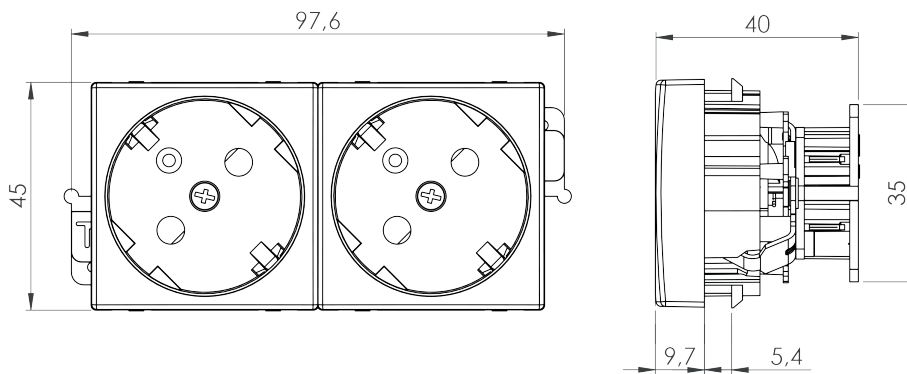

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	50pcs	24x36x17cm	3.820kg	4.90
	Cardboard	600pcs	60x75x52cm	45.840kg	78



Modular Unischuko Sockets with Cable

Triple Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P + $\perp$

CODE: 320.003.102

TECHNICAL DETAILS



Designation:	3 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	104 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

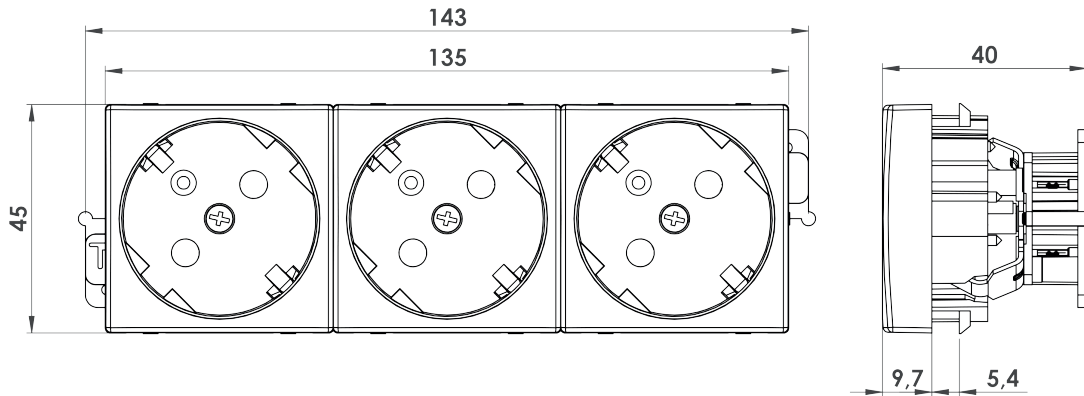

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	40pcs	24x36x17cm	4.430kg	4.90
	Cardboard	480pcs	60x75x52cm	53.160kg	78



Modular Unischuko Sockets with Cable

Quadruple Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P + 

CODE: 320.004.102


TECHNICAL DETAILS



Designation:	4 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	139 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

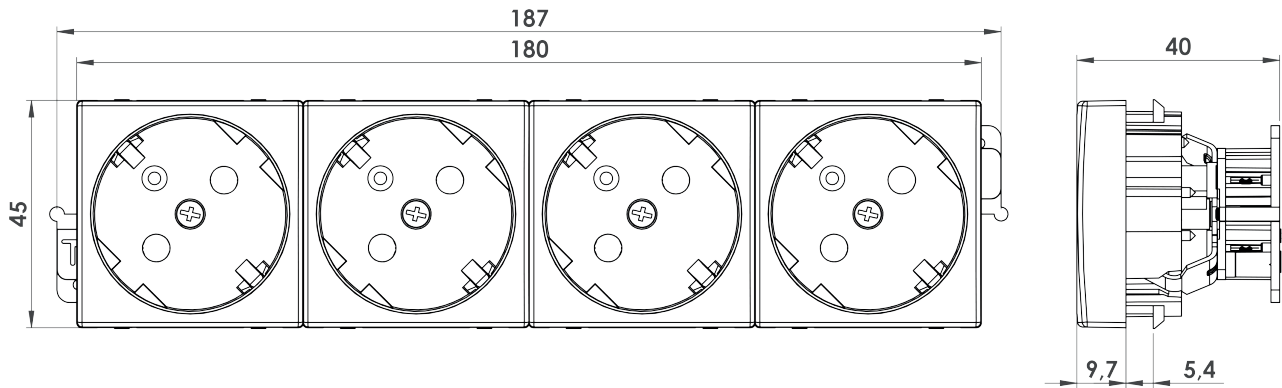

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	30pcs	24x36x17cm	4.440kg	4.90
	Cardboard	360pcs	60x75x52cm	53.280kg	78

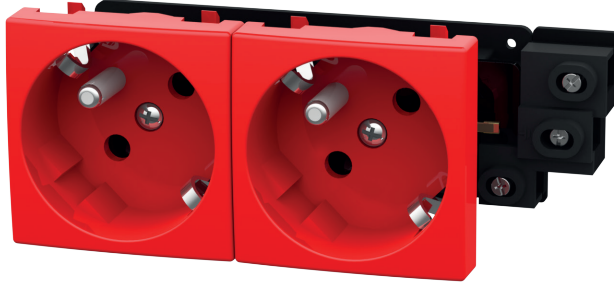

Modular Unischuko Sockets with Terminal

Double Socket for Cable Trunking

200 - 250 V ~

16 A


2P + $\perp$

CODE: 321.002.002


TECHNICAL DETAILS



Designation:	2 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	74 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

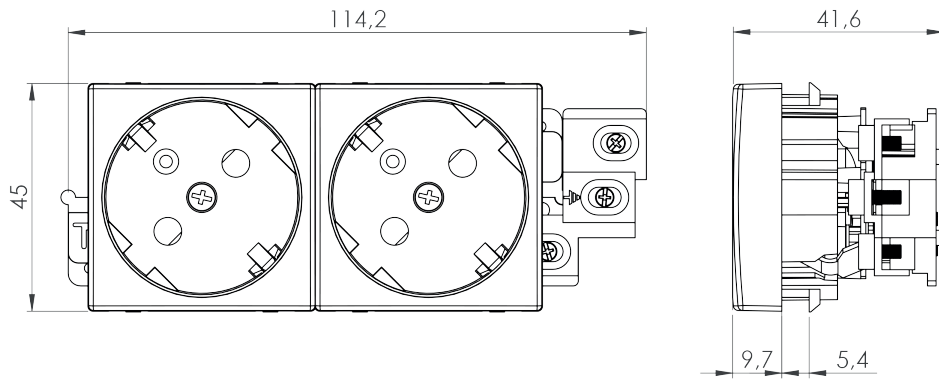

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	50pcs	24x36x17cm	3.970kg	4.90
	Cardboard	600pcs	60x75x52cm	47.640kg	78

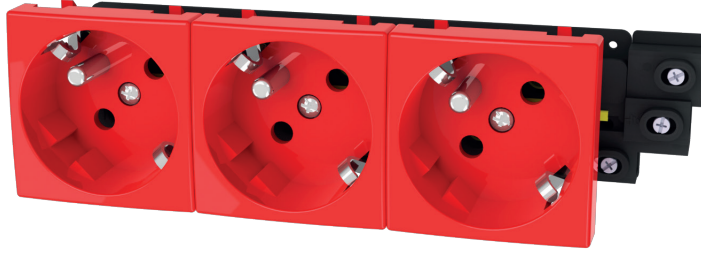

Modular Unischuko Sockets with Terminal

Triple Socket for Cable Trunking

200 - 250 V ~

16 A


2P + $\perp$

CODE: 321.003.002

TECHNICAL DETAILS



Designation:	3 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	108 gr
Casy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

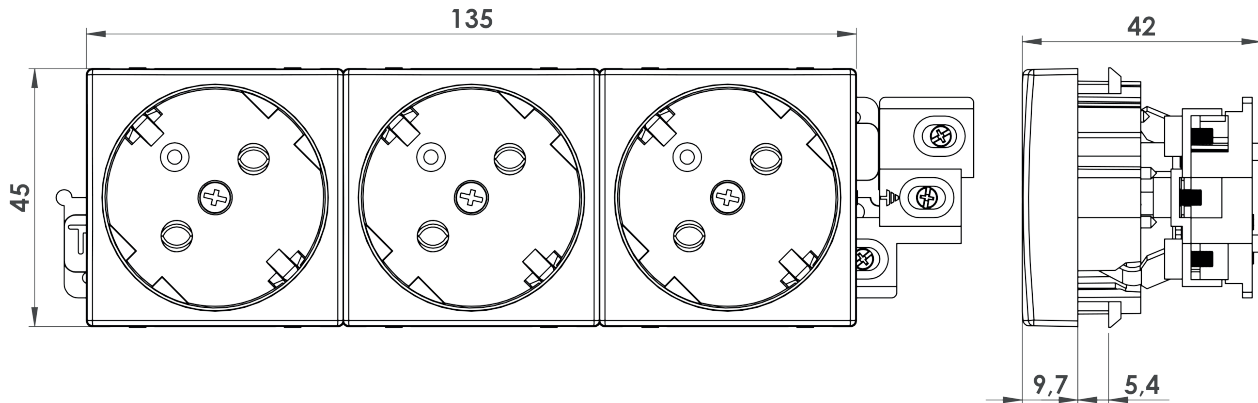

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	40pcs	24x36x17cm	4.590kg	4.90
	Cardboard	480pcs	60x75x52cm	55.080kg	78



Modular Unischuko Sockets with Terminal

Quadruple Socket for Cable Trunking

200 - 250 V ~

16 A


2P + 

CODE: 321.004.002


TECHNICAL DETAILS



Designation:	4 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	142 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

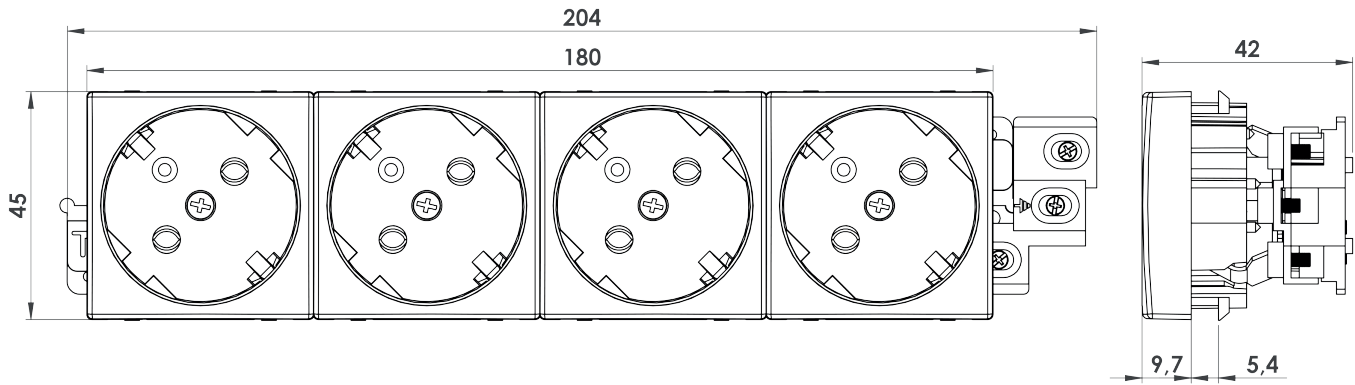

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	30pcs	24x36x17cm	4.530kg	4.90
	Cardboard	360pcs	60x75x52cm	54.360kg	78

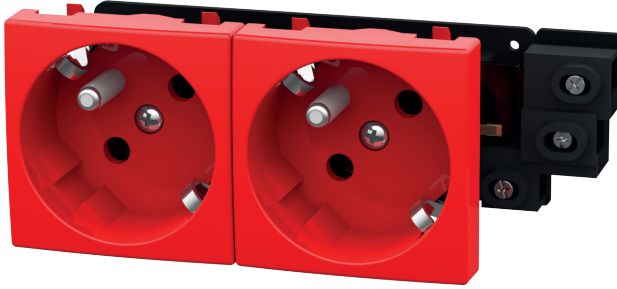

Modular Unischuko Sockets with Terminal

Double Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P + $\perp$

CODE: 321.002.102

TECHNICAL DETAILS




Designation:	2 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	77 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

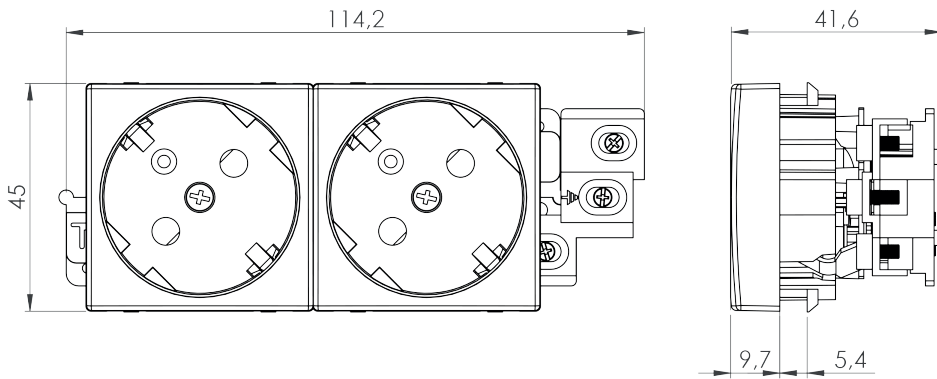

Packing Details:

	Inner Quantity	Dimensions	Gross Weight	CBM
Box	50pcs	24x36x17cm	4.120kg	4.90
Cardboard	600pcs	60x75x52cm	49.440kg	78

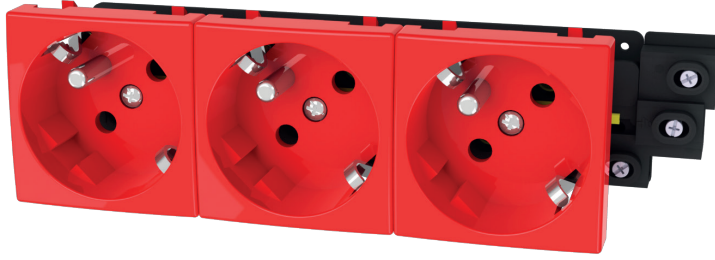

Modular Unischuko Sockets with Terminal

Triple Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P + $\perp$

CODE: 321.003.102

TECHNICAL DETAILS



Designation:	3 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	112 gr
Casy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

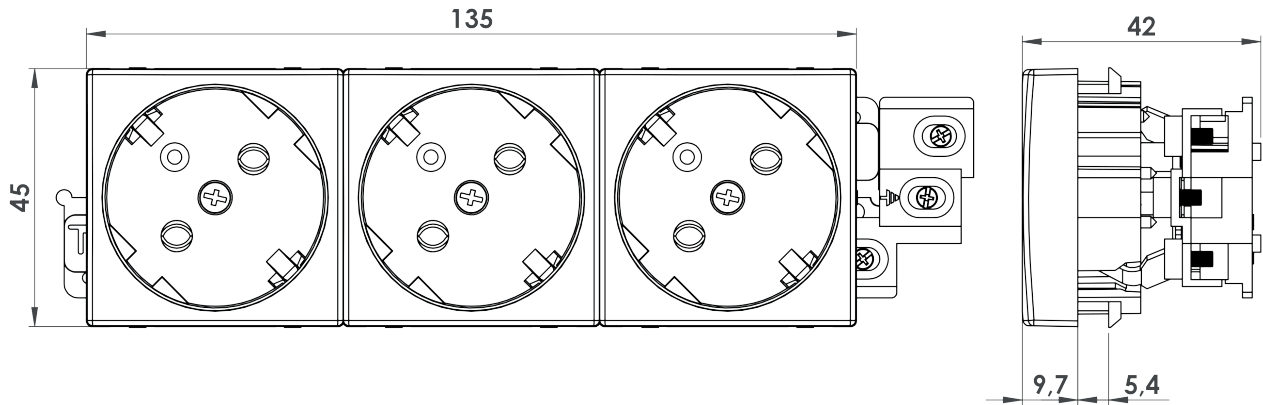

		Inner Quantity	Dimensions	Gross Weight	CBM
Packing Details:	Box	40pcs	24x36x17cm	4.750kg	4.90
	Cardboard	480pcs	60x75x52cm	57.000kg	78



Modular Unischuko Sockets with Terminal

Quadruple Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P + $\perp$

CODE: 321.004.102


TECHNICAL DETAILS



Designation:	4 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	147 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

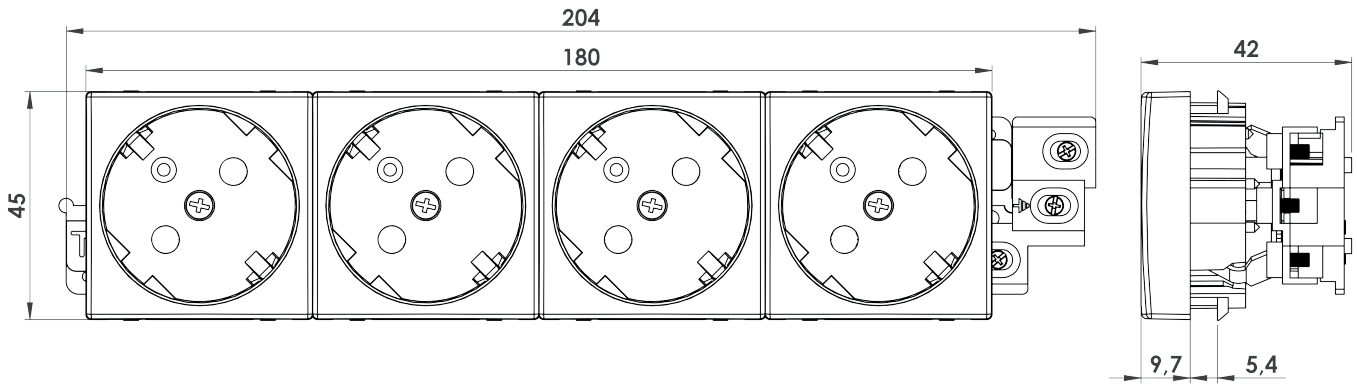

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	30pcs	24x36x17cm	4.680kg	4.90
	Cardboard	360pcs	60x75x52cm	56.160kg	78

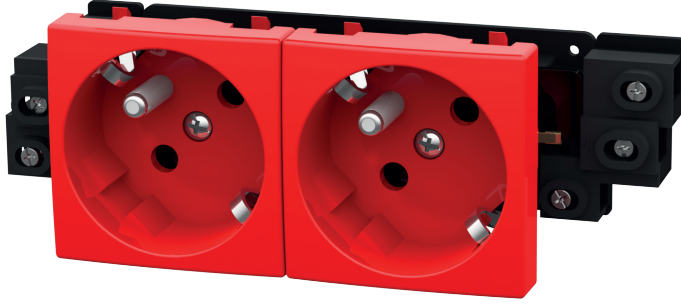

Modular Unischuko Sockets with Double Terminal

Double Socket for Cable Trunking

200 - 250 V ~

16 A


2P + 

CODE: 322.002.002

TECHNICAL DETAILS



Designation:	2 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	87 gr
Cover-Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

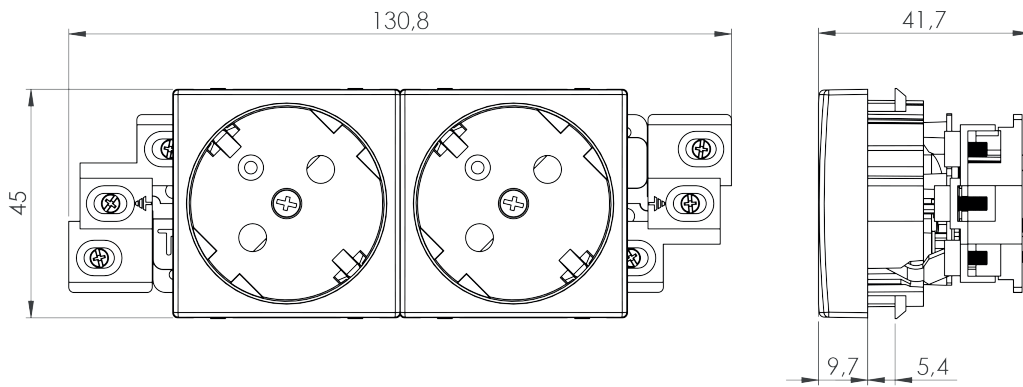

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	50pcs	24x36x17cm	4.620kg	4.90
	Cardboard	600pcs	60x75x52cm	55.440kg	78



Modular Unischuko Sockets with Double Terminal

Triple Socket for Cable Trunking

200 - 250 V ~

16 A


2P + ⏏

CODE: 322.003.002

TECHNICAL DETAILS



Designation:	3 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	121 gr
Casy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

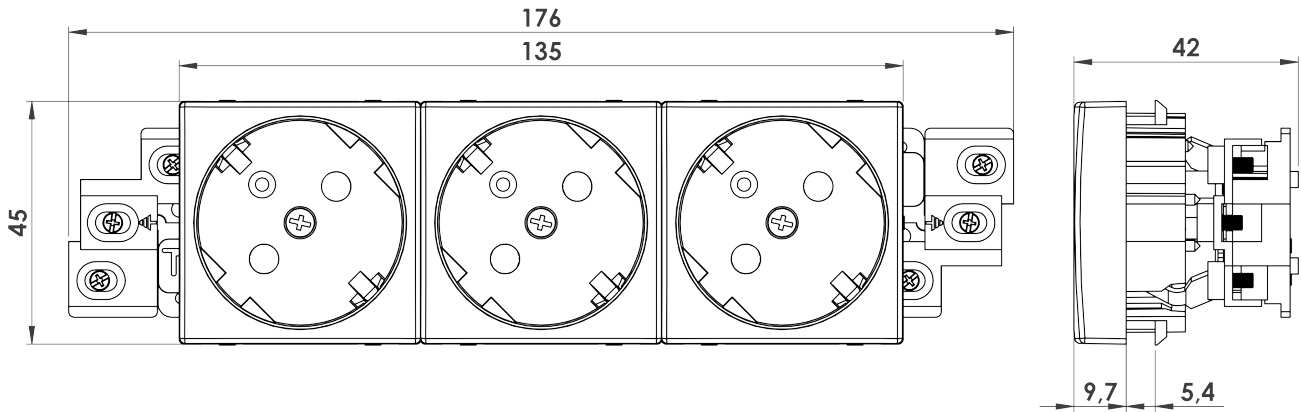

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	40pcs	24x36x17cm	5.110kg	4.90
	Cardboard	480pcs	60x75x52cm	61.320kg	78



Modular Unischuko Sockets with Double Terminal

Quadruple Socket for Cable Trunking

200 - 250 V ~

16 A


2P + $\frac{1}{\text{PE}}$

CODE: 322.004.002


TECHNICAL DETAILS



Designation:	4 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	154 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

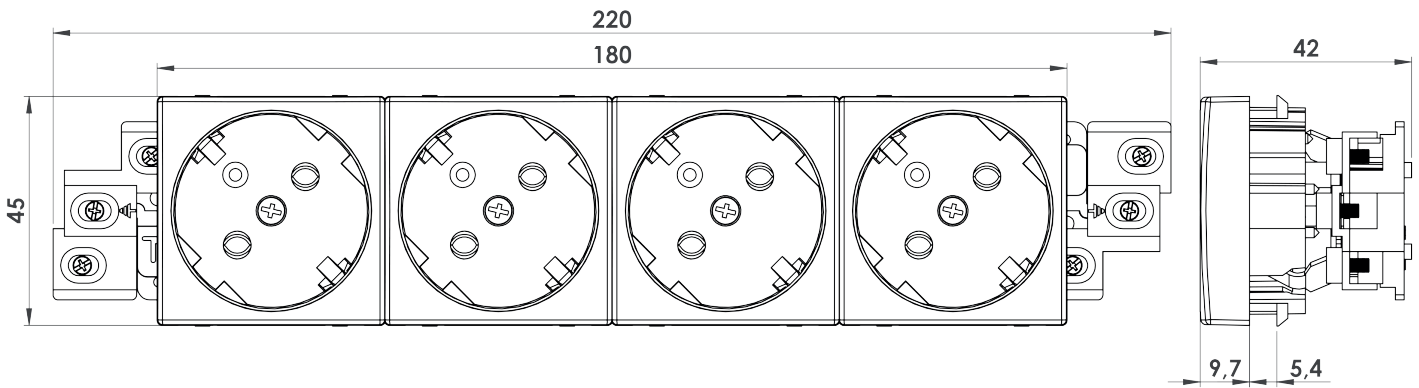

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	30pcs	24x36x17cm	4.890kg	4.90
	Cardboard	360pcs	60x75x52cm	58.680kg	78

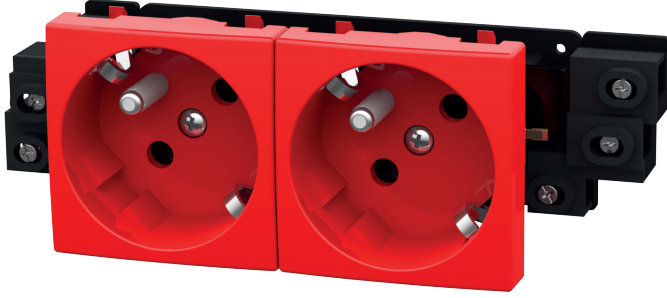

Modular Unischuko Sockets with Double Terminal

Double Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P +

CODE: 322.002.102

TECHNICAL DETAILS



Designation:	2 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	88 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

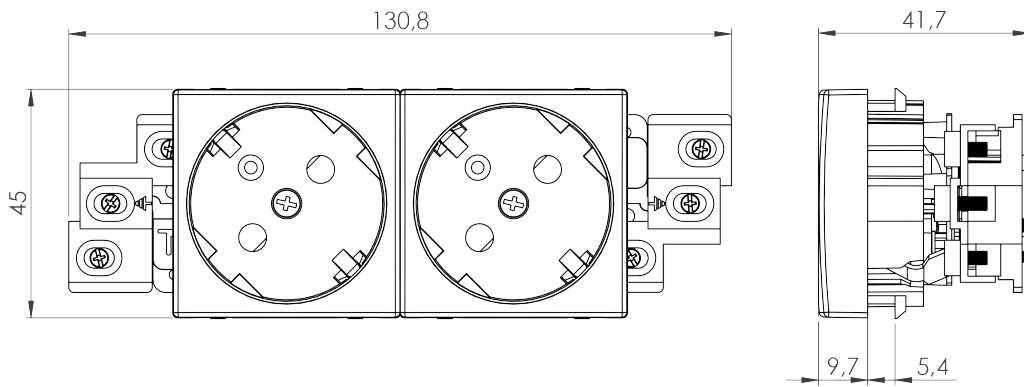

		Inner Quantity	Dimensions	Gross Weight	CBM
Packing Details:	Box	50pcs	24x36x17cm	4.670kg	4.90
	Cardboard	600pcs	60x75x52cm	56.040kg	78



Modular Unischuko Sockets with Double Terminal

Triple Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P + $\perp$

CODE: 322.003.102

TECHNICAL DETAILS



Designation:	3 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	124 gr
Casy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

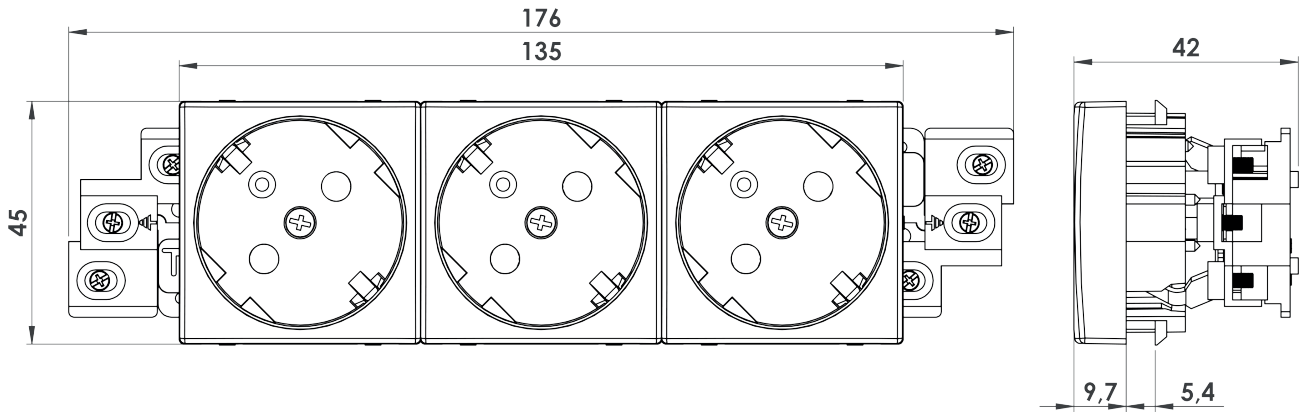

		Inner Quantity	Dimensions	Gross Weight	CBM
Packing Details:	Box	40pcs	24x36x17cm	5.230kg	4.90
	Cardboard	480pcs	60x75x52cm	62.760kg	78



Modular Unischuko Sockets with Double Terminal

Quadruple Socket for Cable Trunking

with Child Protection

200 - 250 V ~

16 A


2P + 

CODE: 322.004.102

TECHNICAL DETAILS



Designation:	4 ps. UPS Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²)
Standard:	DIN 49440-1:2006-01
Weight:	159 gr
Easy-Cover Plastic Material:	PA6
Contact-Contacting Plastic Material:	PA6
Screw:	Cq - 22
Contact Material:	MS 58 Brass

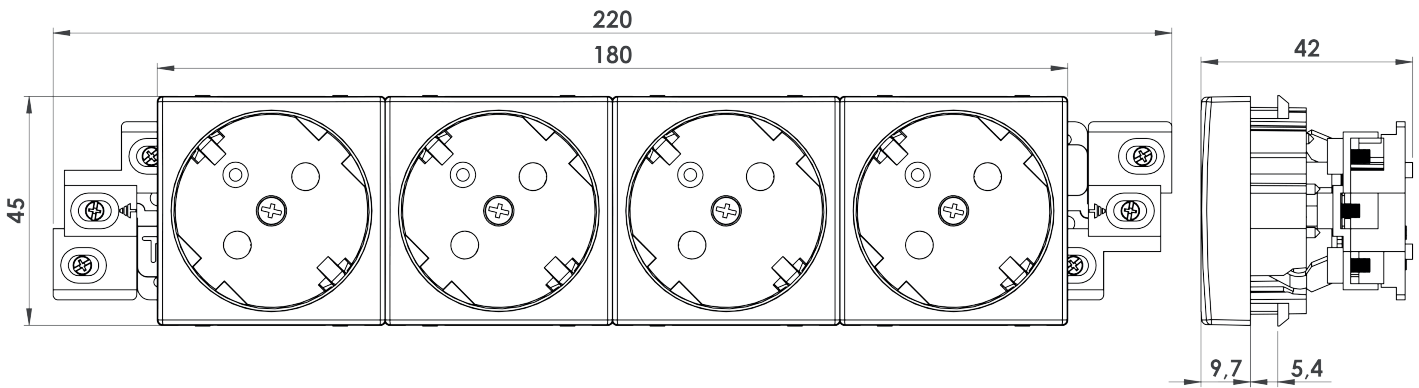

		Inner Quantity	Dimensions	Gross Weight	CBM
 Packing Details:	Box	30pcs	24x36x17cm	5.040kg	4.90
	Cardboard	360pcs	60x75x52cm	60.480kg	78