


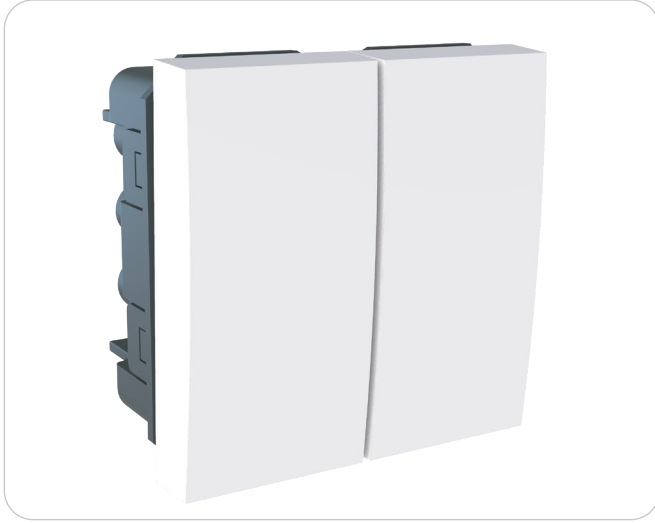

ON - OFF Switch



45x45 mm Double Switch


CODE: 722.045.022

TECHNICAL DETAILS



Designation:	DIN Mounted Electrical Socket
Connection Method:	3-Pole Screw Terminal 16A Max (Tightening torque 0.8 - 1.8 Nm)
Mounting:	Clip for 35 mm DIN Rail, EN 50-022
Socket Standard:	Schuko Type F DIN 49440-1:2006-01
Weight:	40 gr
Operating / Storage Temperature:	-10 to +70 °C (-49 to 158 °F)
Operating / Storage Humidity:	Max 90% RH (non-condensing)
Protection Type / Class:	IP 20

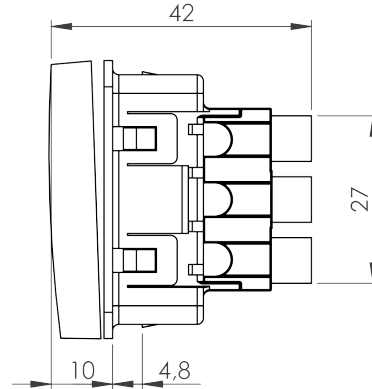

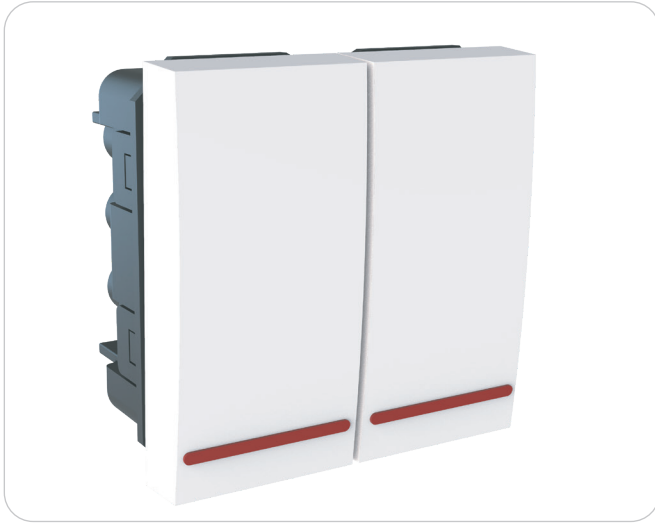

ON - OFF Switch

45x45 mm Double Illuminated Switch

CODE: 722.045.122

TECHNICAL DETAILS



Designation:	German Socket 2P+E
Connection Method:	3-Pole Screw Terminal 16A Max (2,5mm ²) with strain relief angel
Standard:	DIN 49440-1:2006-01
Weight:	40 gr
Casy-Cover Plastic Material:	Thermoplastic Elastomer
Contact-Contacting Plastic Material:	Copolymer
Cable Holder Plastic Material:	PA6
Screw:	Cq - 22
Busbar:	MS 58 Brass

