



Rubber plug

200 250 V ~

16 A


2P + $\perp$

CODE: 215.116.320

TECHNICAL DETAILS



Designation:	Schuko / German Angled Plug 2P+E
Connection Method:	3 Pole Screw Terminal 16A Max (2,5mm ²) with strain relief angel
Standard:	DIN 49440 1:2006 01
Net Weight:	48,5 gr
Casy Cover Plastic Material:	Thermoplastic Elastomer TP
Contact Contacting Plastic Material:	Copolymer
Cable Holder Plastic Material:	PA6
Terminal Method:	Screw Cq 22
Operateing Temperature:	20 °C (4 °F) ... +80 °C (+176 ° F)

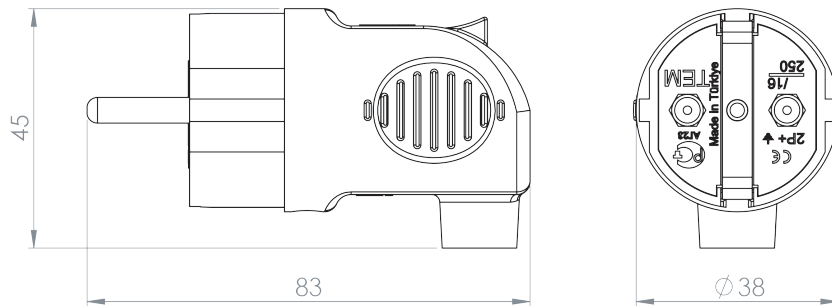

		Inner Quantity	Dimensions	Gross Weight	CBM
Packing Details:	Box	24pcs	20.5x28x10cm	1355kg	1.91
	Cardboard	288pcs	49x54x33cm	17.180kg	29.11



Black Movable UTE Angled Plug

200 250 V ~

16 A



2P + $\perp$

CODE: 215.316.320

TECHNICAL DETAILS



Designation:	French type Mains UTE Angled Plug 2P+E
Connection Method:	3 Pole Screw Terminal 16A Max (2,5mm ²) with strain relief angel
Standard:	DIN 49440 1:2006 01
Net Weight:	48,5 gr
Casy Cover Plastic Material:	Thermoplastic Elastomer
Contact Contacting Plastic Material:	Copolymer
Cable Holder Plastic Material:	PA6
Terminal Method:	Screw Cq 22
Operateing Temperature:	20 °C (4 °F) ... +80 °C (+176 ° F)

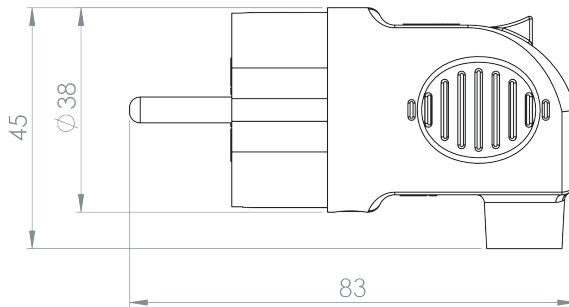

Packing Details:

	Inner Quantity	Dimensions	Gross Weight	CBM
Box	24pcs	20.5x28x10cm	1355kg	1.91
Cardboard	288pcs	49x54x33cm	17.180kg	29.11