



DIN Rail Schuko Socket

200 250 V ~

16 A


2P +

CODE: 217.216.170

TECHNICAL DETAILS



Designation:	DIN Mounted Electrical Socket
Connection Method:	3 Pole Screw Terminal 16A Max (Tightening torque 0.8 1.8 Nm)
Mounting:	Clip for 35 mm DIN Rail, EN 50 022
Socket Standard:	Schuko Type F DIN 49440 1:2006 01
Net Weight:	78gr
Operating / Storage Temperature:	10 to +70 °C (49 to 158 °F)
Operating / Storage Humidity:	Max 90% RH (non condensing)
Protection Type / Class:	IP 20

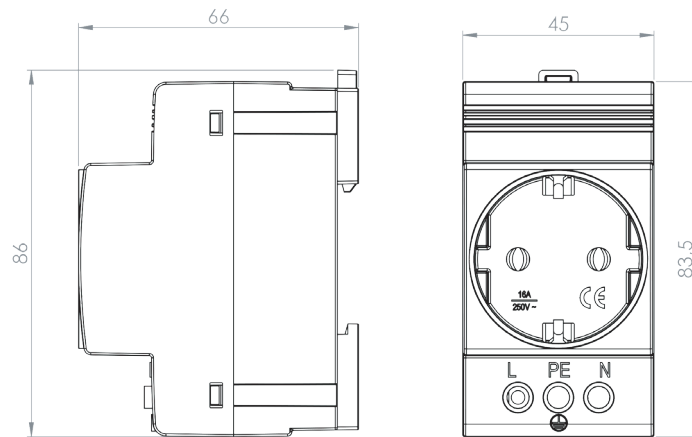

Packing Details:

	Inner Quantity	Dimensions	Gross Weight	CBM
Box	12pcs	20.5x28x10cm	1.076kg	1.91
Cardboard	144pcs	49x54x33cm	12.032kg	29.11



DIN Rail Schuko Socket with LED Light

200 250 V ~

16 A


2P +

CODE: 217.216.171

TECHNICAL DETAILS



Designation:	DIN Mounted Electrical Socket
Connection Method:	3 Pole Screw Terminal 16A Max (Tightening torque 0.8 1.8 Nm)
Mounting:	Clip for 35 mm DIN Rail, EN 50 022
Socket Standard:	Schuko Type F DIN 49440 1:2006 01
Net Weight:	78 gr
Operating / Storage Temperature:	10 to +70 °C (49 to 158 °F)
Operating / Storage Humidity:	Max 90% RH (non condensing)
Protection Type / Class:	IP 20

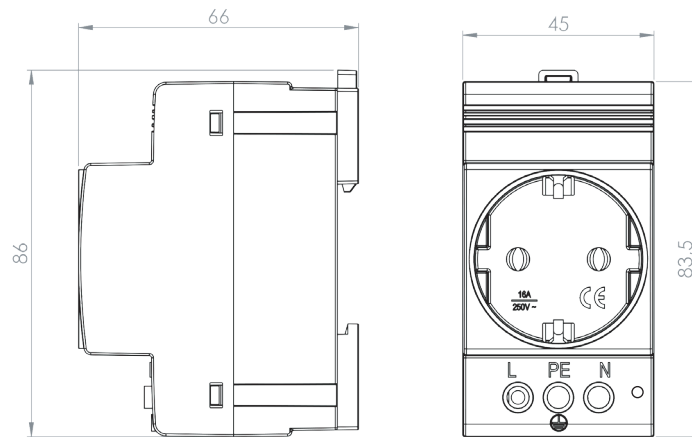

Packing Details:

	Inner Quantity	Dimensions	Gross Weight	CBM
Box	12pcs	20.5x28x10cm	1.076kg	1.91
Cardboard	144pcs	49x54x33cm	12.032kg	29.11